


Operable Wall

A space management essential, **ISTIQ Acoustic Operable Wall System** is a perfect tool in maximizing the value and the multipurposeness of your precious room space, by partitioning them only **WHEN DESIRED, WITHOUT SACRIFICING SOUNDPROOFING** integrity.

Model Number	Acoustic Performance (STC)	Applications
OW 100A	48-52 dB	Convention Halls
OW 100B	43-47 dB	Lecture Rooms
OW 96	36-42 dB	Meeting Rooms
OW 85	32-35 dB	Classrooms

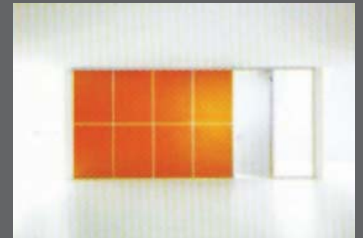

- * Acoustic Performance - 32 - 52 dB (NIC 44 for ASTM E336-90, ISO 140-4)
- * Adjacent Accessibility - PASS DOORS can be fitted to OW Series (fig. 2)
- * RETRACTABLE ACOUSTIC SEAL; Top, Bottom, & 'Nose' Side (fig. 3)
- * Storage Flexibility - 'T' or 'X' JUNCTIONS fits every floor layout.

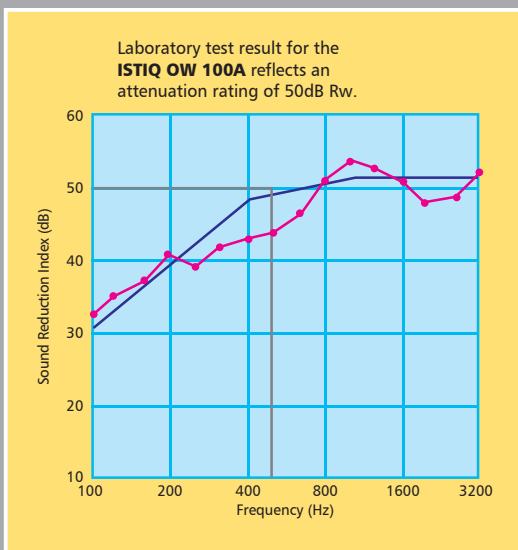


Fig. 1: Acoustic Performance

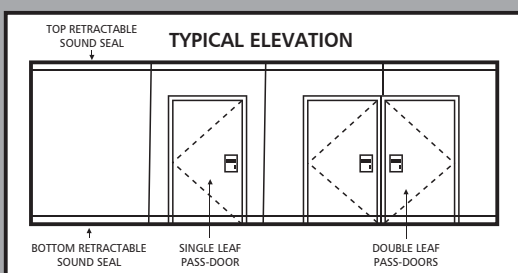


Fig. 2: Pass Doors

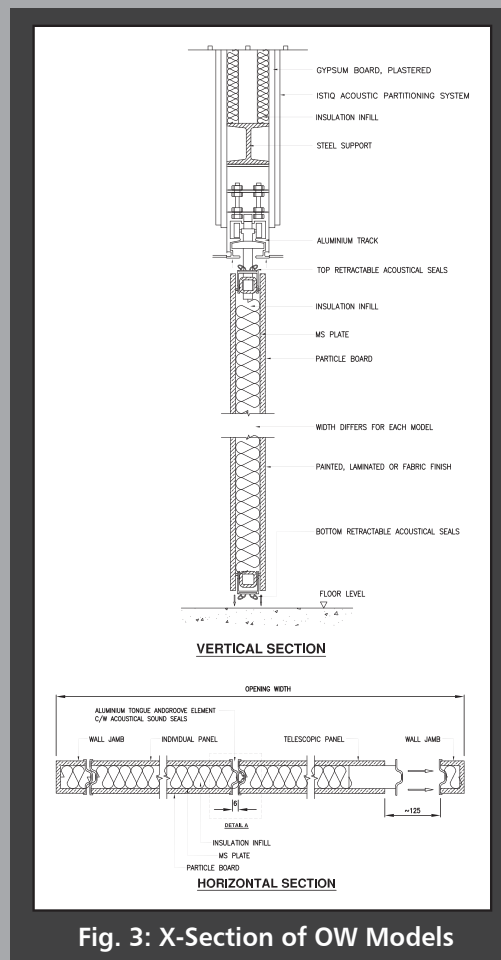


Fig. 3: X-Section of OW Models