



WHERE SECURITY &  
TECHNOLOGY MEET

TITANUS

## 4MP H.265 MINI IR BULLET CAMERA

4 Megapixel IR Vandal Dome, 25fps, 4mm Lens, IP67, IR LED: 25M




### Model

TITANUS IPS-BT402E-P

### Features

- 4MP, 1/3" Progressive Scan CMOS
- 4mm Fixed Lens
- Support H.265 Codec
- 2pcs IR LED
- Smart IR Range: 15 - 25 meters
- Smart Defog
- TVS 6000V, Lightning/ Surge 2000V Protection
- IP67
- Support GV-VMS+

### Dimension

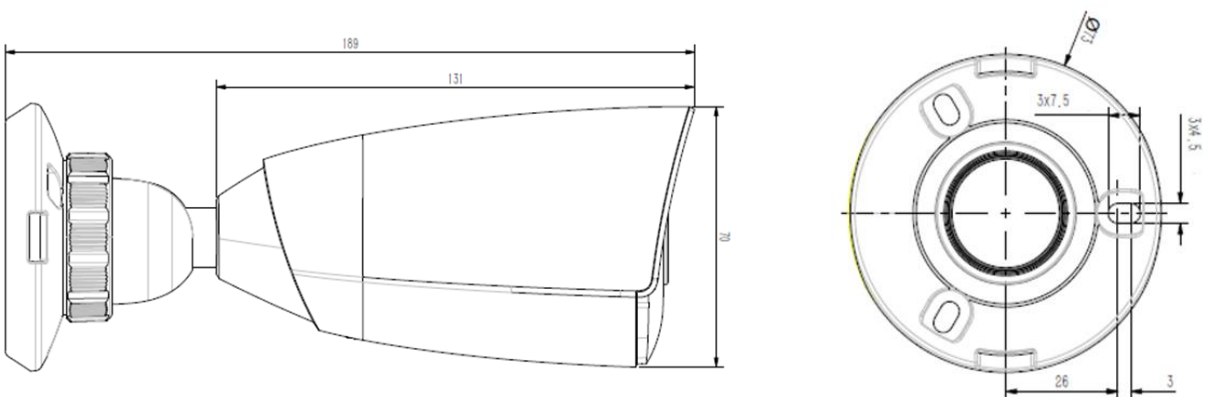

## SPECIFICATIONS

MODEL		IPS-BT402E-P
<b>CAMERA</b>		
Sensor	1 /3" Progressive Scan CMOS	
Pixel	4 Megapixel	
Resolution	2560 x 1440 / 25fps	
Min. Illumination	Color: 0.05 Lux; B/W: 0 Lux with IR ON	
Day/ Night	IR Cut Filter with Auto Switch	
Shutter Time	1s to 1/100,000s	
Wide Dynamic Range	100 dB	
Digital Noise Reduction	3D DNR	
Lens	4mm Fixed Lens	
Field of View	82.7°	
IR Distance	15 - 25 meters	
IR LED	2pcs IR LED	
<b>IMAGE</b>		
Video Compression	H.265/ H.264/ MJPEG	
Audio Compression	G.711A/ G.711U/ ADPCM/ AAC	
Image Setting	Brightness, Saturation, Contrast	
HLC	Yes	
ROI	4 Zones	
Defog	Smart Defog	
<b>NETWORK</b>		
Alarm Trigger	Motion Detection/ IP Conflict/ MAC Conflict/ Port Alarm/ Mask Alarm	
Supported Web Browser	IE, Chrome, Firefox, Safari	
Web Language	English, Spanish, Korean, Italian, Turkish, Thai, Russian, Traditional Chinese	
Network Protocols	IPv4/ IPv6/ HTTP/ 802.1x/ FTP/ SMTP/ UPnP/ SNMP/ DNS/ DDNS/ NTP/ RTSP/ TCP/ UDP/ DHCP/ PPPoE	
<b>INTERFACE</b>		
Ethernet	1-ch RJ45 10M/ 100M Ethernet Interface	
Audio I/O	N/A	
Video Output	N/A	
Alarm I/O	N/A	
Reset Button	Yes	
Edge Storage	Micro SD Slot, Max 128GB	
<b>GENERAL</b>		
Power	12V DC/ PoE	
Power Consumption	Max. 4.5W (IR LED OFF) ; Max. 7W (IR LED ON)	
Operating Temperature	-30°C to 60°C (IR LED OFF); -20°C to 40°C (IR LED ON)	
Operating Humidity	0% - 95% RHG	
Ingress Protection	IP67	
Dimensions	189mm x 70mm x 70mm	
Product Weight	700g	