

4 Ports PoE Ethernet Switch


4 ports PoE Ethernet Switch is security surveillance Ethernet Switch which aims at Ethernet high definition surveillance and security system. The product fully combines the characteristics of security surveillance, provides fast packet forwarding ability and abundant backplane bandwidth, which ensures clear image and fluent transmission. ESD and surge protection circuit can improve product stability. The product supports one key CCTV model, with VLAN function can restrain the network storm, protect the information security, prevent the viral transmission and cyber attack, fully satisfy the Ethernet video security surveillance system and Ethernet project needs.

Model

POE-104M-2M



Application

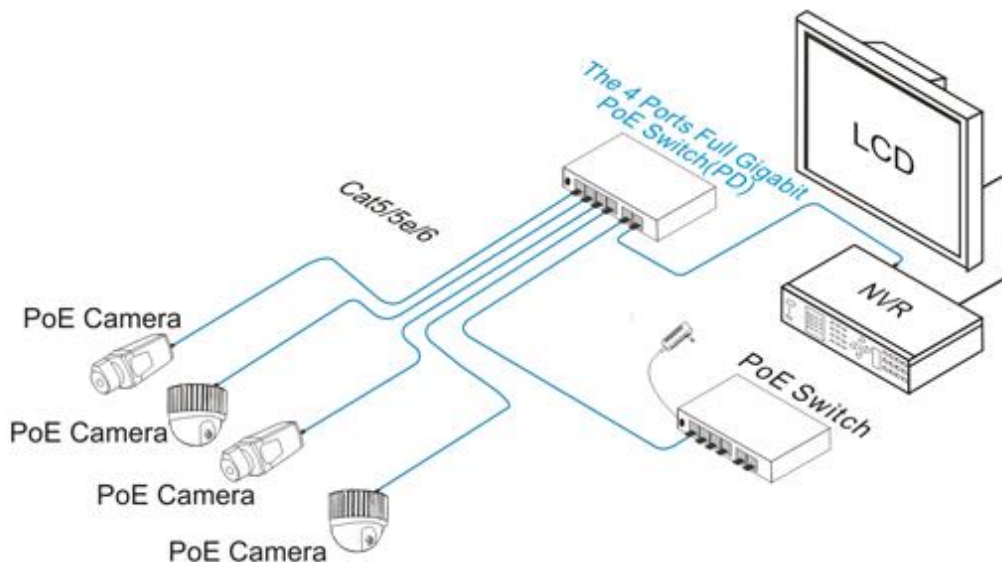

SPECIFICATIONS

Item		POE-104G-2G
Power	Power Supply	Power Adaptor
	Voltage Range	DC48V~54V
	Consumption	<5W
Ethernet	Speed	1-4 port:Default:10/100Mbps; CCTV:10Mbps;UPLINK:100Mbps
	Transmission Distance	1-4 port:Default:0~100m; CCTV:0~250m;UPLINK:100m
Network Switch	Ethenet Standard	IEEE 802.3/802.3u/802.3af/at
	Exchange Capacity	1.0Gbps
	Packet Forwarding Rate	0.74Mpps
	Packet Buffer	768K
	MAC	2K
Status Indicator	Power Light	1pc(Red)
	Ethernet Port Light	2pcs(Yellow&Green) on RJ45,yellow indicates PoE, greenindicates Link/Act
	Surveillance Module Light	1pcs(Green), green indicates CCTV
Protection Level	Pluse Group	Level 3 Standard: IEC61000-4-4
	ESD	1a Contact Discharge Level 3 1b Air Discharge Level 3Standard: IEC61000-4-2
	Anti-thunder Level	6KV Standard: IEC61000-4-5
Working Environment	Working Temperature	-10°C~55°C
	Storage Temperature	-40°C~85°C
	Humidity(Non-condensing)	0~95%
Mechanical	Dimension(L*W*H)	135mm×85.6mm×27mm
	Weight	315g