



WHERE SECURITY &  
TECHNOLOGY MEET

## 2.0MP Full HD IR Bullet IP Camera

2.0 Megapixel Full HD IR Bullet, 1080p@30fps, 2.8-12mm Vari-focal Megapixel Lens, POE, IR LED: 25M




### Model

TITANUS IPS-BS207H-P

### Features

- 1/2.7 " Progressive Scan CMOS
- 2.8-12mm lens
- 1080P@30fps
- Multiple Streams
- Smart IR Up to 35m
- Low bitrate control
- 3D DNR,dWDR,ICR
- Support ROI,Corridormode,HLC

### Dimension

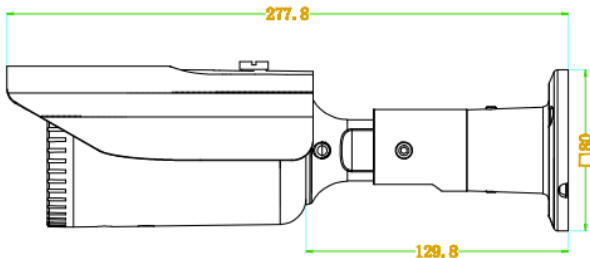

# SPECIFICATIONS

MODEL		IPS-BS207H-P
<b>CAMERA</b>		
Sensor	1 /2.7" Progressive Scan CMOS	
Pixel	2.0 Megapixel	
Resolution	1920 x 1080 / 30fps	
Min. Illumination	Color :0.2Lux@(F1.2,AGC ON);B/W: 0 Lux@(IR LED ON)	
Day/ Night	ICR	
Shutter Speed	1/5 - 1/20000	
LENS	2.8-12 mm	
FOV	90° - 35°	
WDR	> 120 dB	
DNR	2D / 3D	
IR Distance	25 meters	
IR LED	24pcs	
HLC	Y	
Defog	N/A	
ROI	Yes	
<b>IMAGE</b>		
Video Compression	H.265/ h.264/ MJPEG	
Bit Rate (CBR/VBR)	Main stream: 1080P: 500Kbps-12Mbps , 720P: 200Kbps-8Mbps ; Sub stream 100kb-6000kb	
Audio Compression	G.711, RAW_PCM	
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector	
<b>NETWORK</b>		
Network Protocols	IPv4,802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, Unicast and Multicast	
Alarm Trigger	Motion Detection, Network Disconnect, Disk Alarm	
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.	
Security	User security authentication, Reset, Hardware Watch Dog	
System Compatibility	Onvif	
<b>GENERAL</b>		
Ingress Protection	IP66	
Power Supply	DC12V/ POE	
Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)	
Operating Humidity	0% - 90% RH	
Weight	800g	
Dimensions	277x80mm	