



WHERE SECURITY &
TECHNOLOGY MEET

5MP Vandal-proof Mini IP Dome



Features



- Smart Stream
- Smart IR II
- Built-in Microphone
- IP67-Rated Weather Proof
- 0.005Lux Ultra Low-light
- 120dB Super WDR

Model

TITANUS IPS-DM527-M1

Dimension

Unit: mm

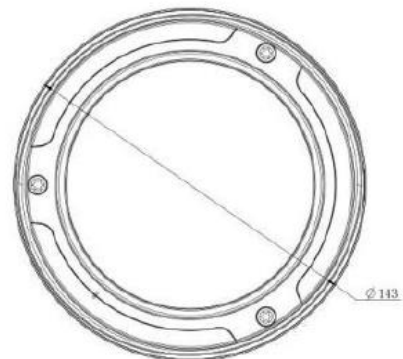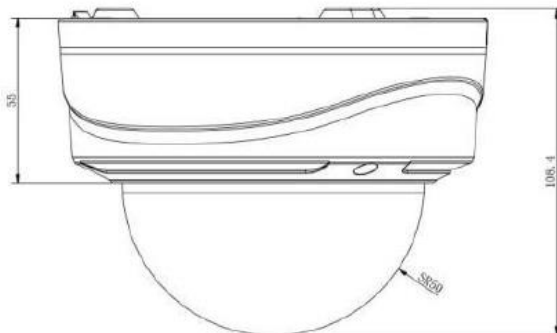

SPECIFICATIONS

MODEL		IPS-DM527-M1
CAMERA		
Image Sensor	1/2.8" Progressive scan CMOS	
Minimum Illumination	Color: 0.005Lux @ F1.2 B/W: 0 lux with IR on	
WDR	120dB Super WDR	
Lens	Motorized 2.8-12mm @ F1.4 ; P-Iris	
Field of View	H76° H31° / D88°D36° / V45°~V18°	
Shutter Time	1/100000s~1s	
IR Distance	Up to 60m	
Day & Night	ICR Filter Auto Switch	
VIDEO		
Max. Image Resolution	2592 x 1944	
Primary Stream	20fps @ (2592x1944), 30fps @ (1920x1080, 1280x960, 1280x720, 704x576)	
Secondary Stream	30fps@(704x576, 640x480, 640x360, 352x288, 320x240, 320x192, 320x176)	
Tertiary System	30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240, 320x192, 320x176)	
Video Compression	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG	
Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)	
Image Setting	Brightness/Contrast/Saturation/Sharpness	
NETWORK		
Ethernet	1*RJ45 10M/100M Ethernet Port	
Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL	
AUDIO		
Audio Compression	G.711/AAC	
Audio I/O	Built-in Microphone and 1 Audio Output interface	
SYSTEM		
Alarm I/O	1/1	
Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 256G	
Advanced Function	Privacy Masking, Backlight Compensation, HLC, 2D DNR, 3D DNR, ROI, Anti-fog, White Balance, EIS, IP Address Filtering	
SIP/VoIP Support	Yes, Voice & Video-over-IP	
Event Trigger	Motion Detection, Network Disconnection, External Input, Audio Alarm, etc.	
Event Action	FTP Upload, SMTP Upload, SD Card Record, External Output, SIP Phone, HTTP Notification, etc	
System Compatibility	ONVIF Profile S & G	
GENERAL		
Working Temperature	-40°C~60°C	
Working Humidity	0~90%(Non-condensing)	
Power Supply	PoE (802.3af) / DC 12V±10%	
Power Consumption	8W MAX	
Weather Proof	Up to IP67-rated for Weather-resistant Performance	
Housing	Vandal-proof IK10-rated Metal Housing	
Weight	1100g	
Dimensions	143mmX108.4mm	