



WHERE SECURITY &  
TECHNOLOGY MEET

## 5MP Vandal-proof Starlight Mini IP Dome




### Features

- Smart Stream
- Advance Functions
- Built-in Microphone
- IP67-Rated Weather Proof
- 0.005Lux Ultra Low-light
- 120dB Super WDR
- Reliable Anti-vibration Performance

### Model

TITANUS IPS-DM503-M1

### Dimension

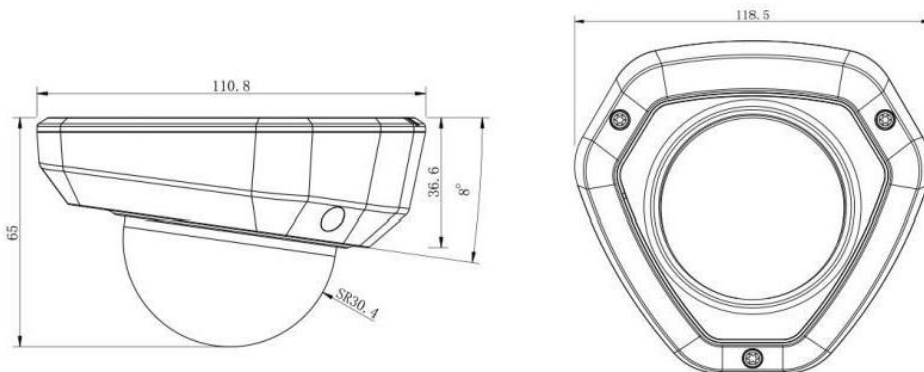

## SPECIFICATIONS

MODEL	IPS-DM503-M1
<b>CAMERA</b>	
Image Sensor	1/2.8" Progressive scan CMOS
Minimum Illumination	Color: 0.005Lux @ F1.2 B/W: 0 lux with IR
WDR	120dB Super WDR
Lens	3.6mm @ F2.2
Field of View	H80° / D102° / V59°
Shutter Time	1/100000s~1s
IR Distance	Up to 25m
Day & Night	ICR Filter Auto Switch
<b>VIDEO</b>	
Max. Image Resolution	2592 x 1944
Primary Stream	20fps @ (2592x1944), 30fps @ (1920x1080, 1280x960, 1280x720, 704x576)
Secondary Stream	30fps@(704x576, 640x480, 640x360, 352x288, 320x240, 320x192, 320x176)
Tertiary System	30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240, 320x192, 320x176)
Video Compression	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG
Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)
Image Setting	Brightness/Contrast/Saturation/Sharpness
<b>NETWORK</b>	
Ethernet	1*RJ45 10M/100M Ethernet Port
Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL
<b>AUDIO</b>	
Audio Compression	G.711/AAC
Audio I/O	Built-in Microphone; 1/1
<b>SYSTEM</b>	
Alarm I/O	1/1
Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 256G
Advanced Function	Privacy Masking, Backlight Compensation, HLC, 2D DNR, 3D DNR, ROI, Anti-fog, White Balance, EIS, IP Address Filtering
SIP/VoIP Support	Yes, Voice & Video-over-IP
Event Trigger	Motion Detection, Network Disconnection, External Input, Audio Alarm, etc.
Event Action	FTP Upload, SMTP Upload, SD Card Record, SIP Phone, HTTP Notification, etc.
System Compatibility	ONVIF Profile S & G
<b>GENERAL</b>	
Working Temperature	-40°C~60°C
Working Humidity	0~90%(Non-condensing)
Power Supply	PoE (802.3af) / DC 12V±10%
Power Consumption	2.5W MAX, 5.5W MAX (With IR on)
Weather Proof	Up to IP67-rated for Weather-resistant Performance
Housing	Vandal-proof IK10-rated Metal Housing
Weight	500g
Dimensions	118.5mmX110.8mmX65mm